


KERN MXS Adiposity scale

Affordable adiposity scale for overweight patients

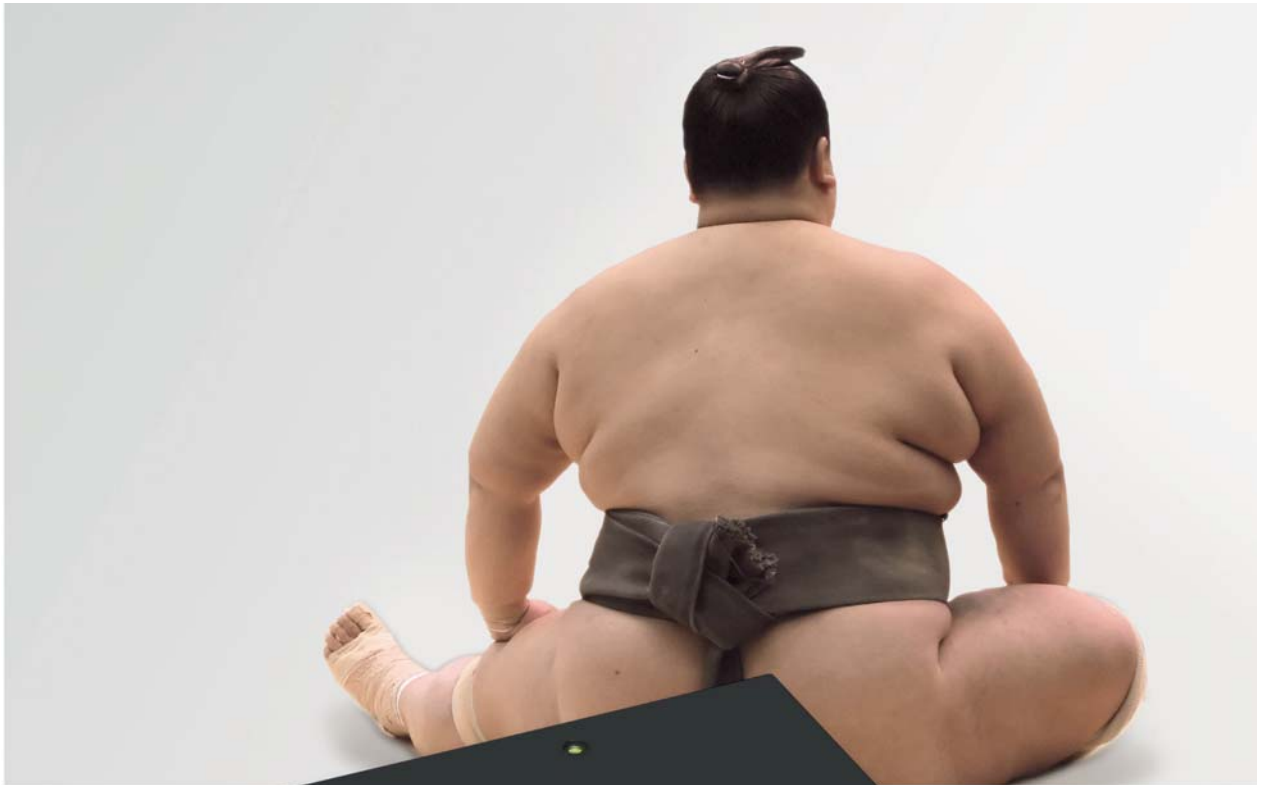

Medical scales 2011

Your KERN specialist dealer:



Medical scales
2011



Features:

- Verified according to class III (only MXS-M)
- Approved as a medical device according to 93/42/EEC (only MXS-M)
- Sturdy steel weighing plate with a non-slip and wear-resistant surface
- For easy and hygienic cleaning
- Low platform height facilitates access or placement of a chair, etc.
- Secure and non-slip positioning with height-adjustable rubber feet
- Dynamic weighing function that allows determination of a stable weighing value, ideal for restless patients
- Data hold function: When the weighing value remains unchanged the weight indicated on the display is automatically "frozen" until the HOLD key is pressed
- Intuitive operation using a keypad (only MXS-M)
- PRE-TARE function for 5 different weights (only MXS-M)
- BMI function to determine normal weight / surplus weight
- 1 Wall mount for the display device
- 2 Model KERN MXS 300K100: Simple and convenient 4-key operation
- Battery- or mains-powered

Options:

- 3 Stand to elevate display device, height of stand approx. 950 mm, **KERN MWS-A01**
- Interface cable RS 232C to connect an external device, only MXS-M, **KERN MPS-A08**
- Protective working cover over the display device, **KERN EOB-A02**

Technical data:

- LCD display, digit height 25 mm
- Dimensions of weighing plate W x D x H 550x550x62 mm
- Dimensions of display device W x D x H 210x110x50 mm
- Cable length of display device approx. 170 cm
- Optional battery operation, 6x 1.5V AA, not included. operating time approx. 70 h
- Mains adapter (external) included
- Net weight approx. 14,5 kg

4 Within the EU, official verification is mandatory by law for scales that are intended for use as a medical device. Please add this to your order. We require the location of use and the post code for the verification.

STANDARD

OPTION



Model	Weighing range [Max] kg	Readout [d] kg	Verification value [e] kg	Mandatory by law Verification		Option DKD Calibr. Certificate	
				KERN		KERN	
KERN MXS 300K100M 4	300	0,1	0,1	965-129		963-129	
KERN MXS 300K100	300	0,1	-	-		963-129	

Pictograms:

Data interface:
The type of interface is shown by the pictogram.

Dynamic Weighing function:
Strong vibrations are filtered out to determine a stable weighing result.

Battery operation:
The battery type is specified for each device.

Mains adapter: 230 V/50 Hz in standard version for Germany. On request GB, AUS or USA version.

Tare: Put back displayed value to "0" during weighing process, e.g. to add or remove weighing material from a container.