

"WALL-E" SERIES MODULAR BENCH AND FLOOR SCALES

Multifunction bench and floor scales, with multifunction weight indicator, hard and sturdy structure and stainless steel loading surface. Easy to use and versatile, guaranteeing precision and reliability. Particularly suitable for industrial and commercial use. Available also in CE-M approved version according to OIML R-76 / EN 45501 standards.

PB PLATFORMS: MAIN FEATURES

- Precise and sturdy structure, suitable for creating scales and automatic weight checking systems for industrial and commercial applications.
- Stainless steel loading surface.
- Standard version is provided with 3000e approved load cell.

For more information, see the [technical data sheet](#).

DFWL INDICATOR: MAIN FEATURES

- Easy to programme and use.
- Wide range of available functions and interfaces, for use in many different kinds of industrial and commercial weighing applications.
- Standard fitted with a support bracket with adjustable inclination, for use on the column.

For more information, see the [technical data sheet](#).

AVAILABLE CONFIGURATIONS


- **WALL-E COLUMN:**
PBxxx platform + PBCLxxx column + DFWL indicator.
- **WALL-E COMPACT:**
PBxxx platform + PBSTF bracket + DFWL indicator.

OPTIONS ONLY AVAILABLE AT TIME OF ORDER

- CE-M 3000e approved (OIML R-76 / EN 45501) (ECEM1A and ECEM1B options).
- Time / Date.
- Alibi Memory.
- Remote control.
- USB interface, as an alternative of the RJ standard connector.



"Wall-e Column" configuration

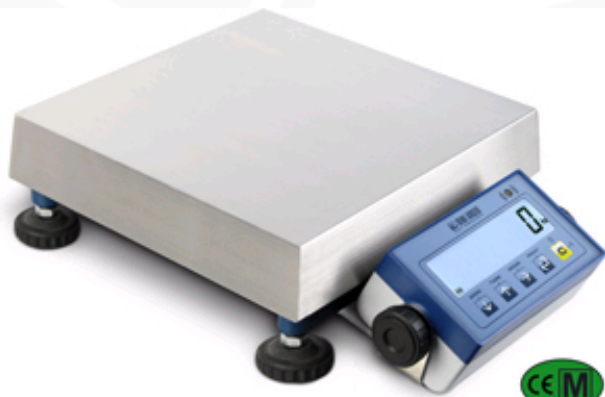

"Wall-e Compact" configuration



PB platforms: capacities and dimensions

Code	Dimensions (LxPxH)	Max Capacity kg	Standard Division g	CE-M Division g (*)
PBT6	330x330x90	6	2	2
PBT15	300x300x90	15	5	5
PBT30	300x300x90	30	10	10
PBQ30	400x400x140	30	10	10
PBQ60	400x400x140	60	20	20
PBQ150	400x400x140	150	50	50
PBX60	600x600x150	60	20	20
PBX150	600x600x150	150	50	50
PBX300	600x600x150	300	100	100
PBE300	800x800x165	300	100	100
PBE600	800x800x165	600	200	200

(*) These divisions are obtainable only with the relative options

Code	Description
DFWL	High performance multifunction weight indicator, 5-key keypad, LCD 25mm backlit display, power supply through 4 AA batteries, IP54 case, RS232 RJ connector, fitted with fixing bracket and 12 Vdc external power adapter.

Columns and fixing brackets

Code	Description
PBCL350	Support column for weight indicators, max 350mm high, for "PB" series single cell platforms, fitted with fixing bracket for indicator.
PBCL500	Support column for the weight indicators, max 500mm high, for "PB" series single cell platforms, fitted with fixing bracket for indicator.
PBCL700	Support column for weight indicators, max 700mm high, for "PB" series single cell platforms, fitted with fixing bracket for indicator.
PBSTF	Fixing bracket for mounting the indicator to the PB series platforms.

Options only available at time of order

Code	Description
ECEM1A	CE-M 3000e initial stamping for class III or IIII scales with capacity from 1 to 30 kg
ECEM1B	CE-M 3000e initial stamping for class III or IIII scales with capacity from 31 to 1500 kg
DFCLK	Real Time Clock (Time/date)
ALMEM	Alibi memory (fiscal memory) with time/date; max. 120.000 weighs
DFTL	Remote control for use up to 8m, configurable as a single tare key or four keys
USBMB	USB interface, as an alternative of the standard connector, for quick connection of the indicator to PC
USBCABMB	USB cable for connection between indicator and PC (to be used with USBMB)
RSCBRJ	RS232/C connection cable (1.5m long) to PC including female 9-pole connector and RJ connector