

MCW09

MCW09 "PROFESSIONAL" SINGLE SECURITY CRANE SCALE SERIES



Stainless steel digital <u>crane scale</u> with IP67 protection against dust and sprays, 40mm DOT LED large display, for maximum visibility from all angles and in any lighting condition, even direct sunlight.

The single security system makes them suitable for lifting and weighing the load.

Sturdy and reliable, usable indoors as well as outdoors. Minimum reduction of the crane's lifting space.

The models with up to 15000 kg capacity are fitted with test certificate obtained with sample weights, for higer capacities the certificate is available on request.

Working in cooperation with:

SC DATA SPEED SRL

STR DONATH N. 115/33 - 400331 - JUD. CLUJ - ROMANIA Tel. 0040-264566473 Fax. 0040-364-815440 office@cantare.com.ro The best solution for advanced industrial applications

CRANE SCALE: MAIN FEATURES

- Single security system, for the lifting and the weighing of the load.
- In compliance with the directives 2006/42 CE, UNI EN 13155/2009, UNI EN 13889, 2014/30/EU.
- Extremely bright large red DOT LED 40mm display, which guarantees a perfect visibility of the weight from any angle, also from a long distance with direct sunlight.

Usable indoors as well as outdoors, great visibility also in full sunlight.

- Adjustable brightness intensity.
- Sturdy STAINLESS steel structure, with IP67 protection degree of the load cell and the electronics, against dust and sprays.
- Fitted with approved galvanised shackles:

GR6 for MCW09T3

GR6 for MCW09T6

GR9 for MCW09T9

GR12 for MCW09T12

GR17 for MCW09T17

GR25 for MCW09T25

GR35 for MCW09T35

GR55 for MCW09T50

- Extremely reduced distance between upper and lower shackles.
- Precision: +/- 0,05% on F.S. for 3T to 9T models
- Precision: +/- 0,1% on F.S. for 12T to 50T models
- 5-key waterproof keypad: ZERO, AUTOMATIC TARE, MODE, PRINT, and ON/OFF.
- Programmable digital filter, for an excellent weight display in any working condition.
- Programmable automatic switch-off function, either through keypad or remote control.
- Fitted with radiofrequency 6-key remote control, configurable as simple automatic tare or as a remote keypad.
- Configured for an 868MHz radio interface or WiFi, for connection to PC or to a remote terminal and printer.
- Rechargeable battery, with an average life of about 30 hours.
- Configured for a second optional extractable battery for 24/7 continuous use.
- Fitted with 230Vac 50 Hz battery charger.
- Programmable digital calibration and Set-Up directly from the keypad or from PC through Dinitools.
- Operating temperature range: -10/+40 °C.

CRANE SCALE: REMOTE CONTROL FUNCTIONS

• The crane scale is fitted with a radiofrequency remote control which allows to do the Zeroing; the tare; enable / disable functions; printing; switching-off the crane scale.

CRANE SCALE: SELECTABLE FUNCTIONS

- PEAK (maximum value read).
- HOLD (lock of the displayed weight).
- Weighing totalization.
- Ib/kg/N conversion (see DFW weight indicators for more functions).
- +/- checkweighing.
- · Percentage weighing.
- Counting.
- Peer-to-peer.
- High Resolution Weighing x 10.



Crane scale MCW09: side view



Crane scale MCW09: extractable battery view

DETAIL 3



Crane scale MCW09: extra-bright 40mm display

DETAIL 4


CODE	WEIGHT (kg)		
CODE	WITHOUT PACKAGING	WITH PACKAGING	
MCW09T3	15	16	
MCW09T6	16	17	
MCW09T9	21	22	
MCW09T12	26	35	
MCW09T17	36	74	
MCW09T25	53	91	
MCW09T30	70	108	
MCW09T50	140	178	

VERSIONS

Max	d	M	d HR
(kg)	(kg)	(kg)	(kg)*
3000	1	1	0,5
6000	2	2	1
9000	5	5	2
12000	5	-	2
17000	10	-	5
25000	10	-	5
30000	20	-	10
50000	20	-	10
	(kg) 3000 6000 9000 12000 17000 25000 30000	(kg) (kg) 3000 1 6000 2 9000 5 12000 5 17000 10 25000 10 30000 20	(kg) (kg) (kg) 3000 1 1 6000 2 2 9000 5 5 12000 5 - 17000 10 - 25000 10 - 30000 20 -

^(*) Divisione HR disponibile con la relativa opzione EHR



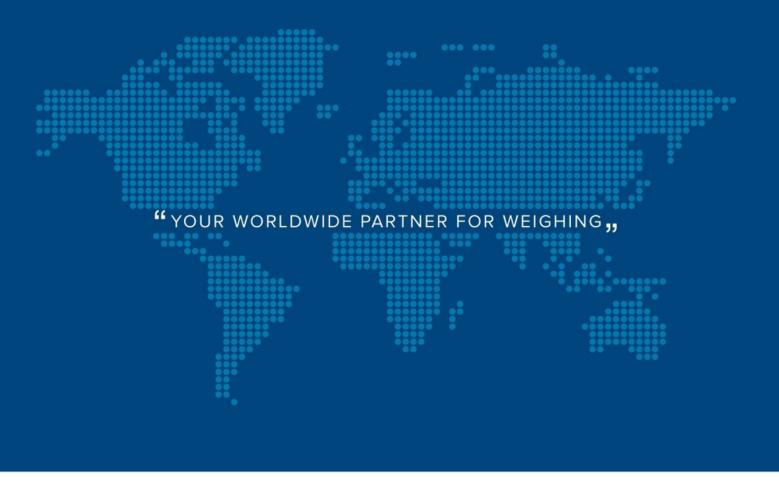

DINI ARGEO FRANCE sarl Nogent-sur-Marne DINI ARGEO GMBH

Sinsheim - Germany

DINI ARGEO UK Ltd

Taunton - United Kingdom

DINI ARGEO WEIGHING INSTRUMENTS Ltd

Shanghai - China

DINI ARGEO WEIGHBRIDGES Calto (RO) – Italy



HEAD OFFICE Via Della Fisica, 20 41042 Spezzano di Fiorano Modena - Italy







SC DATA SPEED SRL

STR DONATH N. 115/33 - 400331 - JUD. CLUJ - ROMANIA

Tel. 0040-264566473 Fax. 0040-364-815440

office@cantare.com.ro

SALES AND TECHNICAL ASSISTANCE SERVICE